

## Model

VFD46R16F40T

Capacity: 40 Ton, 3 Axle  
Mainframe 16" Fabricated I beam  
Dimensions 46 feet long;  
102 inches wide,  
41" rear deck height (light),  
20" kingpin setting  
Cross members: 8" x 6.5# Jr. I-Beam on 20" Centers  
Siderail 12" x 20.7# structural channel; 8" x 8.5# on neck  
Tires 255/70R c 22.5 radials  
Wheels 10 hole steel disc; hub piloted  
Axles/Brakes 3 Rockwell 25,000#, 5 round; 16 1/2" x 7; service chambers; outboard drums; WABCO ABS (4S/2M) on one axle  
Suspension: Hutch H9700T four point with 3 leaf heavy duty springs  
Lights Rubber mounted, sealed wiring harness  
Landing Legs Holland Mark V; 2 speed with sand shoes; 62,500 lb lift capacity  
Dovetail 5 ft. metal covered with traction bars  
Loading Ramps (2) 6' stand up with double

compression springs on rear;  
30 degree rise to upper deck


D-rings 18 total ((14)-1" on rear deck, (4)-1" on front deck)  
Finish: Shot blasted & painted with Carboline Urethane paint

CALL FOR YOUR NEAREST DEALER (800) 562-0730 [www.vikingtrailers.com](http://www.vikingtrailers.com)



# 40 Ton, "Load Handler" Lowboy

Weight - 18,900 lbs +/-3%

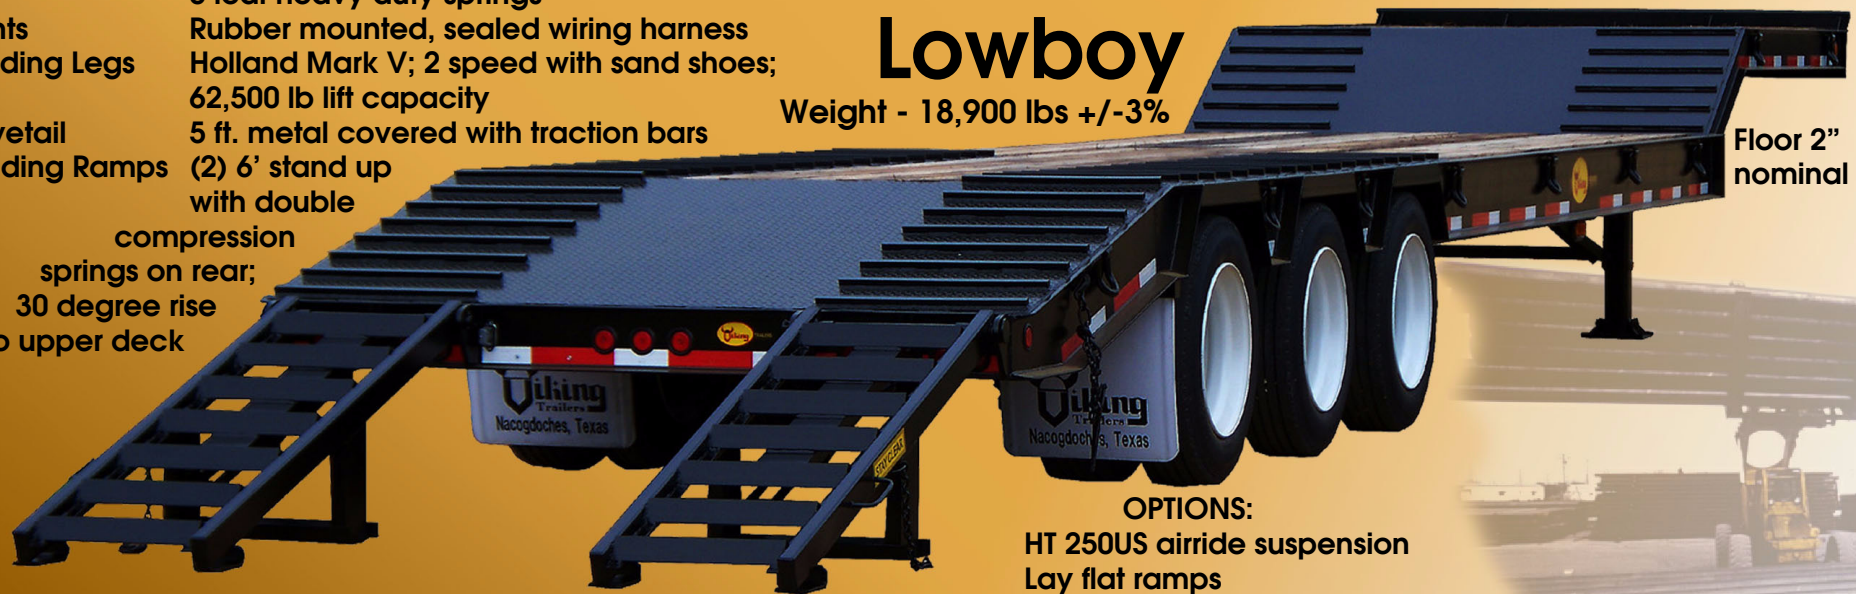

Floor 2"  
nominal oak

OPTIONS:  
HT 250US airride suspension  
Lay flat ramps  
hydraulic assisted ramps  
fold-out outriggers (each)  
third ramp  
Increase to 9 ft. wide

**MADE IN  
U.S.A.**



**BRIGHT COOP, INC**  
(936)564-8378  
NACOGDOCHES, TX

Model VFD46R16F40T



40 Ton,  
"Load Handler"  
Lowboy



MADE IN  
U.S.A.



BRIGHT COOP, INC  
(936)564-8378  
NACOGDOCHES, TX

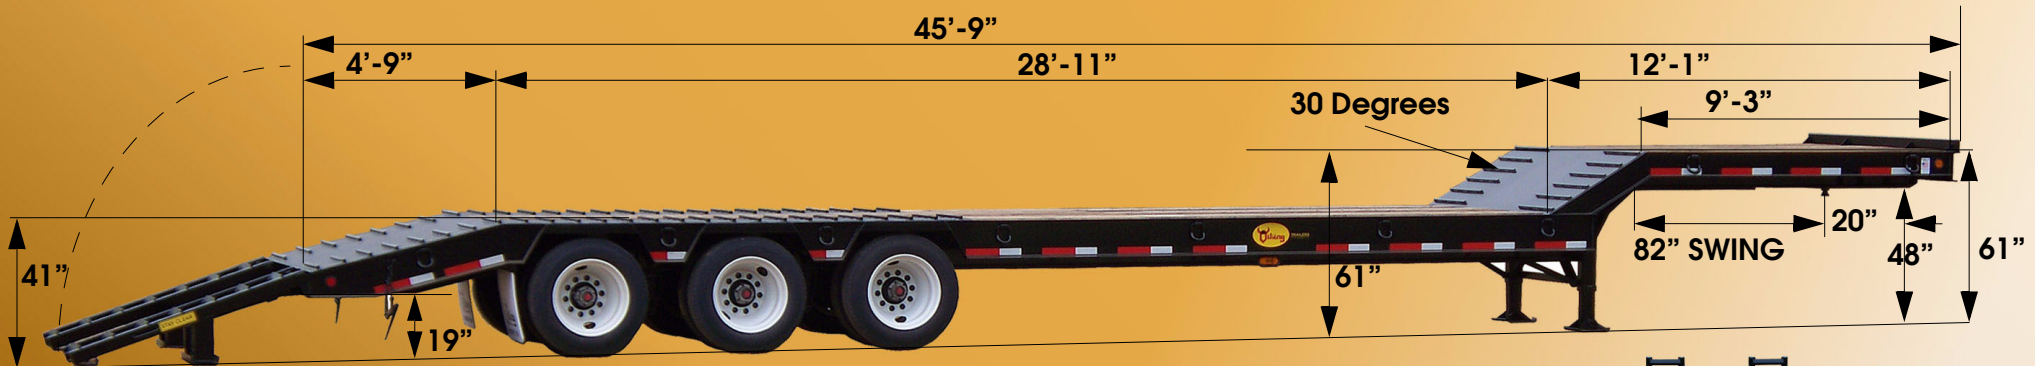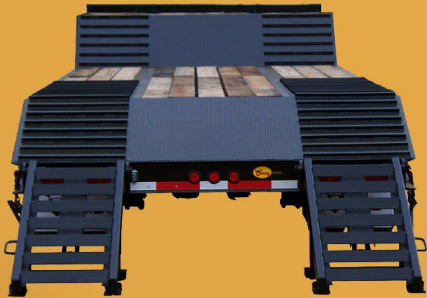

OPTIONS:

- HT 250US Hendrickson airride suspension
- Lay flat ramps
- hydraulic activated load ramps
- third ramp
- fold-out outriggers
- Increase to 9 ft. wide
- longer / shorter lengths

2 Axle 35 Ton Model Available

CALL FOR YOUR NEAREST DEALER (800) 562-0730 [www.vikingtrailers.com](http://www.vikingtrailers.com)

